


FLEXIBLE INSULATED DUCTING

SPC SERIES - SILVER JACKET

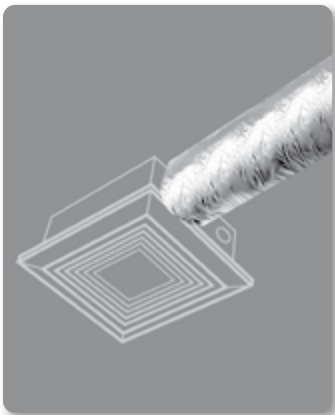

- UL / cUL 181 listed as a class 1 air duct
- Metalized, tear resistant silver jacket is UV and fire resistant
- Formaldehyde free, energy efficient fibreglass insulation
- Inner core constructed with corrosion resistant, galvanized wire
- Ideal for attic installations
- Can be installed in place of galvanized pipe
- Glass fiber insulation reduces heat loss and condensation

R-4.2

Product Code	UPC Code 060672	Size	Packaging	Pack Qty.	Pack Wt. (lbs)	Pack Cube (cu. ft.)
SPC425	530014	4" x 25'	Standard Carton	1	6	1.40
SPC525	530021	5" x 25'	Standard Carton	1	7	1.40
SPC625	530038	6" x 25'	Standard Carton	1	8	1.40
SPC725	530045	7" x 25'	Standard Carton	1	10	2.10
SPC825	530052	8" x 25'	Standard Carton	1	11	2.10
SPC925	530069	9" x 25'	Standard Carton	1	11	2.93
SPC1025	530076	10" x 25'	Standard Carton	1	11	2.93
SPC1225	530083	12" x 25'	Standard Carton	1	12	3.91
SPC1425	530090	14" x 25'	Standard Carton	1	18	6.26
SPC1625	530106	16" x 25'	Standard Carton	1	20	6.26
SPC1825	530113	18" x 25'	Standard Carton	1	22	9.18
SPC2025	530120	20" x 25'	Standard Carton	1	24	9.18

R-6.0

Product Code	UPC Code 060672	Size	Packaging	Pack Qty.	Pack Wt. (lbs)	Pack Cube (cu. ft.)
SPC425R6	530502	4" x 25'	Standard Carton	1	9	1.98
SPC525R6	530519	5" x 25'	Standard Carton	1	11	1.98
SPC625R6	530526	6" x 25'	Standard Carton	1	12	1.98
SPC725R6	530533	7" x 25'	Standard Carton	1	15	2.80
SPC825R6	530540	8" x 25'	Standard Carton	1	17	2.80
SPC925R6	530618	9" x 25'	Standard Carton	1	18	3.77
SPC1025R6	530557	10" x 25'	Standard Carton	1	19	3.77
SPC1225R6	530564	12" x 25'	Standard Carton	1	20	4.88
SPC1425R6	530571	14" x 25'	Standard Carton	1	28	7.54
SPC1625R6	530588	16" x 25'	Standard Carton	1	31	7.54
SPC1825R6	530595	18" x 25'	Standard Carton	1	34	10.77
SPC2025R6	530601	20" x 25'	Standard Carton	1	37	10.77

R-8

Product Code	UPC Code 060672	Size	Packaging	Pack Qty.	Pack Wt. (lbs)	Pack Cube (cu. ft.)
SPC425R8	530700	4" x 25'	Standard Carton	1	10	2.67
SPC525R8	530717	5" x 25'	Standard Carton	1	11	2.67
SPC625R8	530724	6" x 25'	Standard Carton	1	12	2.67
SPC725R8	530731	7" x 25'	Standard Carton	1	14	3.63
SPC825R8	530748	8" x 25'	Standard Carton	1	15	3.63
SPC925R8	530755	9" x 25'	Standard Carton	1	16	4.74
SPC1025R8	530762	10" x 25'	Standard Carton	1	19	4.74
SPC1225R8	530779	12" x 25'	Standard Carton	1	21	6.00
SPC1425R8	530786	14" x 25'	Standard Carton	1	24	8.96
SPC1625R8	530793	16" x 25'	Standard Carton	1	26	8.96
SPC1825R8	530809	18" x 25'	Standard Carton	1	29	12.54

Code Compliance:

Dundas Jafine recommends that you check with the local code body, having jurisdiction in your area, to determine applicable codes and R-value requirements. UL 181, NFPA 90A & 90B, BOCA, ICBO, SBCC, HUD/FHA MIN. Property STD.

Core Material: Double wall, 2 ply lamination of high density black polyester film

Steel Wire: Corrosion resistant, zinc coated wire

Glass Fiber Insulation: Glass fiber insulating blanket in various R-values

Vapor Barrier: Tear resistant silver jacket with reinforced scrim

Flame Spread: Less than 25

Smoke Developed: Less than 50

Vapor Barrier Permeability: 0.17 Perms

Temperature Range: -20°F to 250°F

Max. Rated Velocity: 5000 FPM

Max. Rated Positive Pressure: 10 in. WC

Max Rated Negative Pressure: 1/2 in. wc.