

ProFlex™ DRYER DUCT



- Ideal for both gas and electric dryer applications
- UL2158A listed and marked for safe dryer venting
- Constructed of heavy duty, fire resistant aluminum foil laminate that encapsulates a high density, corrosion resistant wire helix
- Will not support combustion

| Product Code | UPC Code 060672 | Size | Packaging | Pack Qty. | Pack Wt. (lbs) | Pack Cube (cu. ft.) |
|--------------|--------------------|--------------------------|-----------------------|-----------|-------------------|------------------------|
| BTD45 | 600052 | 4" x 5' | Retail Box | 18 | 16 | 1.44 |
| BTD48 | 600106 | 4" x 8' | Retail Box | 18 | 18 | 1.44 |
| BTD48ZW | 600106 | 4" x 8' | Retail Box / Cut Case | 24 | 21 | 1.50 |
| BTD48TC | 600090 | 4" x 8' w/tension clamps | Retail Box | 18 | 18 | 1.44 |
| BTD420ZW | 600212 | 4" x 20' | Retail Box / Cut Case | 10 | 21 | 2.37 |
| TD425 | 600250 | 4" x 25' | Bulk | 1 | 2.50 | 0.44 |
| TD45TC | 600144 | 4" x 5' w/tension clamps | Polybag | 12 | 8 | 1.08 |
| TD450 | 600304 | 4" x 50' | Bulk | 1 | 4.56 | 0.74 |
| TD48TC | 600151 | 4" x 8' w/tension clamps | Polybag | 12 | 8 | 1.08 |


MAXIMUM VELOCITY: 5500 FPM

TEMPERATURE RANGE: -20°F to 285°F

BENDING RADIUS: 1 x diameter

NOTE: Per UL 2158A only ducts 8' or less can be UL marked

AIR FRICTION LOSS IN STRAIGHT RUNS

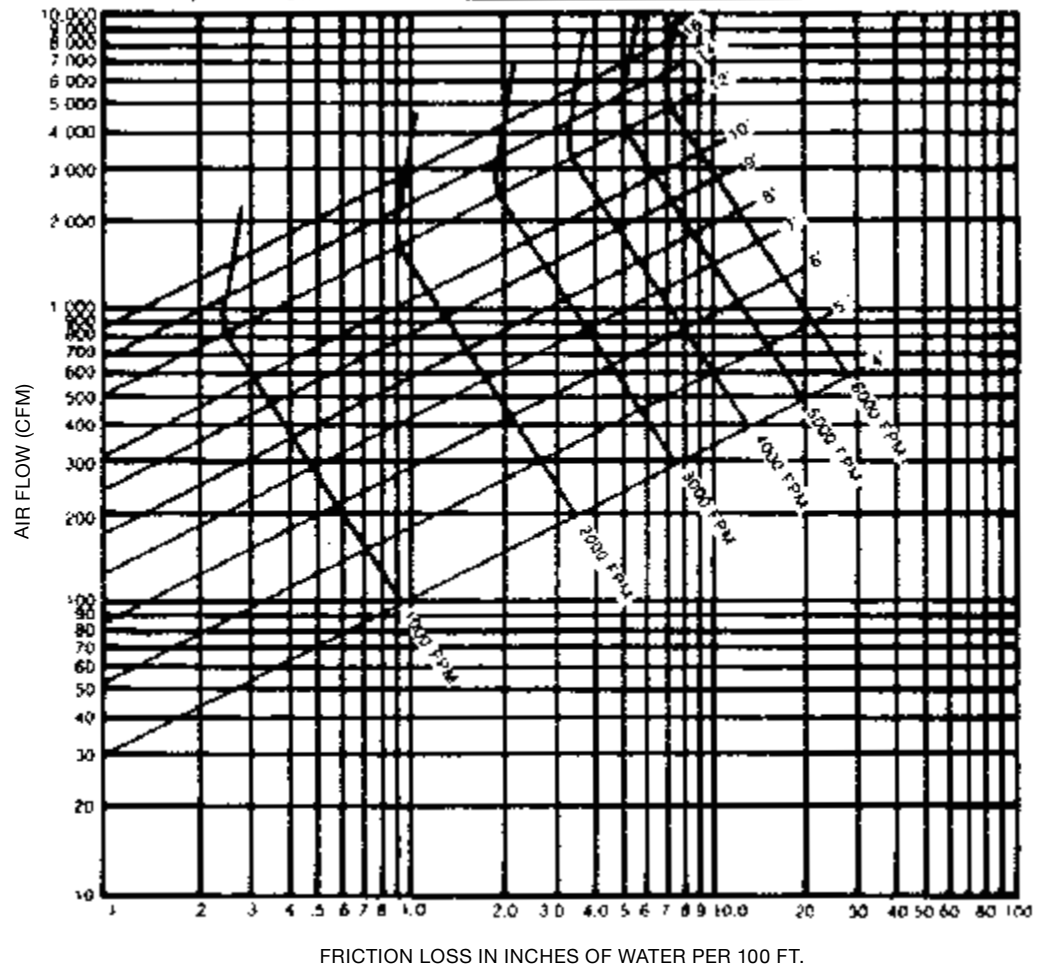

Scan this QR code to view helpful product feature and installation videos